


MACTECH

DWS-24co ROV

DIAMOND WIRE SAW 24" CUTOFF

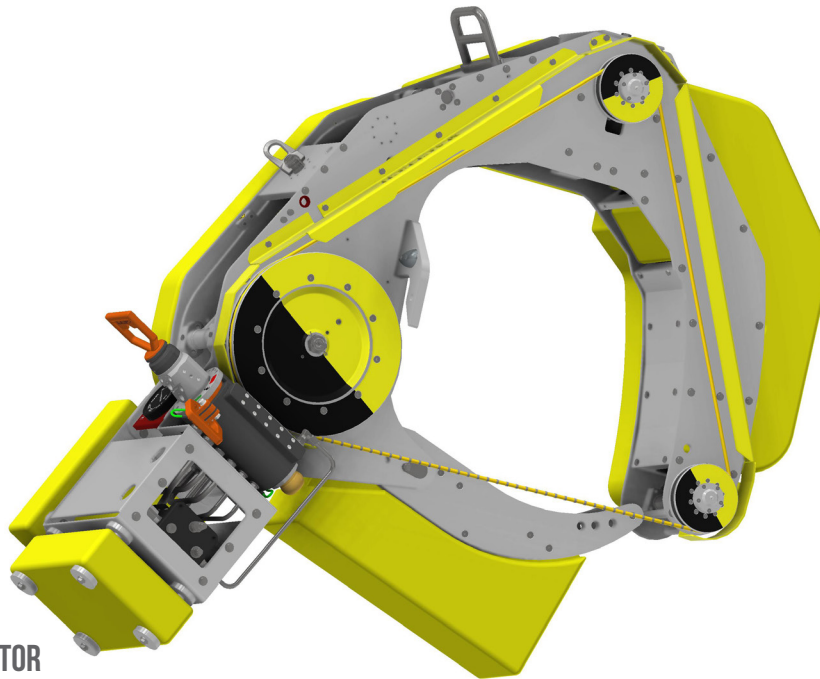

PART# 607-0328
3000 METER BUOYANCY
HOT STAB AND COMPENSATOR

SPECIFICATIONS		HYDRAULIC REQUIREMENTS	
Cutting Capacity	Ø 10" - Ø 24"	Drive	15 gpm @ 3000 psi
	Ø 254 - Ø 610mm		57 lpm @ 207 bar
Operating Dimensions	76" x 68" x 25"	Feed	.5 gpm @ 500 psi
	1923 x 1715 x 630mm		2 lpm @ 34 bar
Operating Weight	(Dry) 550 lbs / (Wet) 93 lbs	Clamp	.5 gpm @ 1500 psi
	(Dry) 250 kg / (Wet) 42kg		2 lpm @ 103 bar
ACCESSORIES AVAILABLE		PART NUMBER	
Ø 4" - Ø 10" (102-254mm) Saddle Insert		607-0293	
Diamond Wire (Steel)		443-4410P-0134	
Diamond Wire (Concrete)		443-4010R-0134	
Diamond Wire (Premium Concrete)		443-4410R-0134	
Hydraulic Control Cart		607-0105	
Support Package (SP, TK)		607-0328-PKG	
Spares Kit		607-0328-SP	
Tool Kit		607-0328-TK	

All dimensions and hydraulic requirements are for reference and may be subject to change without notice. Machine performance is subject to application and operator capability; please discuss your requirements directly with a Mactech sales representative. All information given and all sales made by Mactech Inc. are subject to their terms and conditions.

MACTECH INC.
4079 PEPIN AVE UNIT 4
RED WING MN 55066
800-328-1488
INFO@MACTECHONSITE.COM

MACTECH OFFSHORE
302 IDA ROAD
BROUSSARD LA 70518
337-839-2793
INFO@MACTECHOFFSHORE.COM

MACTECH KENTUCKY
3880 INDUSTRIAL DRIVE
PADUCAH KY 42001
270-442-1559
INFO@MACTECHONSITE.COM

MACTECH WISCONSIN
2515 CLEVELAND AVE
MARINETTE WI 54143
800-328-1488
INFO@MACTECHONSITE.COM

MACTECH INTERNATIONAL
CONTACT US FROM ANYWHERE
AROUND THE WORLD
337-839-2793
INFO@MACTECHOFFSHORE.COM

WORK HARD

WORK SAFE

WE BEFORE ME

WELCOME CHALLENGES

WOW THEM